

KOBAN



FEATURES

- ✓ Simple and integrative structure design, easy in installation.
- ✓ Housing with aluminum material, excellent heating radiation performance.
- ✓ High luminous efficacy, small lumen depreciation, long lifespan.




TECHNICAL SPECIFICATIONS


Item No	LED-UFO100W (8767967)	LED-UFO150W (8767968)	LED-UFO200W (8767969)
LED light source	SMD2835	SMD2835	SMD2835
Input voltage	AC220-240V	AC220-240V	AC220-240V
Working temp.	-20°C a 50°C	-20°C a 50°C	-20°C a 50°C
Lm/W	100	100	100
Power	100W	150W	200W
Lumen	10000lm	15000lm	20000lm
Beam angle	90°	90°	90°
CRI	Ra>80	Ra>80	Ra>80
Color temp.	6000K	6000K	6000K
Lifetime	50000hr	50000hr	50000hr
Total harmonic distortion	<10%	<10%	<10%
Work humidity	20-80%RH	20-80%RH	20-80%RH
IP Rating	IP65	IP65	IP65
Size(DxH)	Φ300x160mm	Φ350x160mm	Φ400x160mm

GAMME ANGLE

100W

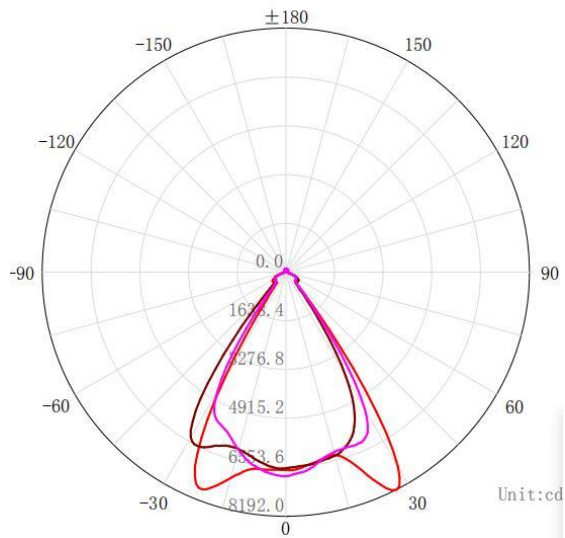

150W

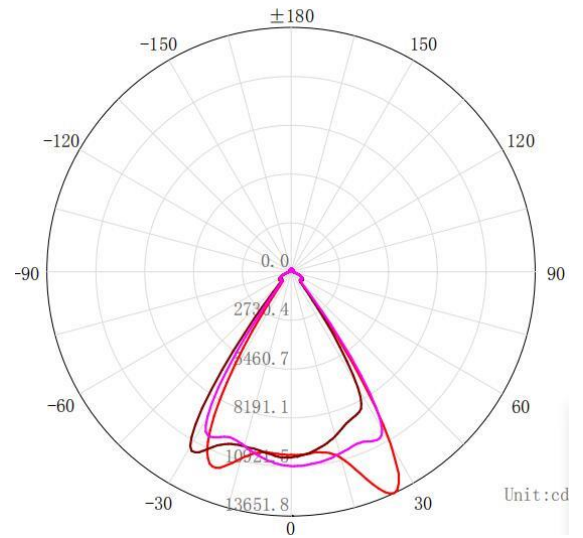

200W

