



ISO 5801:2008  
EN 60204-1:2006+A1:2009+AC:2010







## CHARACTERISTICS

Description	Unit	KFNFL 254-402
Voltage	V	230 V
Frequency	Hz	50/60
Air throughput unimpeded air flow	m <sup>3</sup> /h	280 / 320
Rated current max.	A	0.26 / 0.24
Power	W	41 / 38
Noise level	dB (A)	48 / 50
Temperature range	°C	-25 a +70
Colour	-	RAL 7035
Protection category to EN 60529	-	IP55
Protection	-	Impedance protected
Speed	rpm	2600 / 2700
Weight	g	1450
Life expectancy	h	60.000

## DIMENSIONS (mm)

Fan and filter	Exit filter
KFNFL 254-402 – Code: 0190108	KFL 254 – Code: 0190117

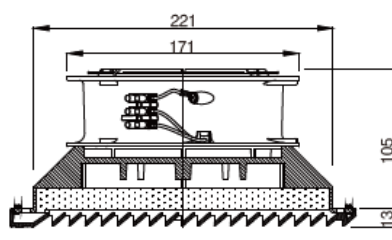

info@grupotemper.com  
tec@grupotemper.com  
www.grupotemper.com

Temper Energy International, S.L.  
Polígono Industrial, Nave 18, E-33199 Granda Siero, Asturias, Spain  
T: +34 985 793 204 / F: +34 985 986 341